




















## Reference Guide

### Regulatory and Warning Signage

	Ra-1 (Stop Sign)		Rb-1A (Speed Limit)		Ra-2 (Yield Sign)
	Rb-25 (Keep Right)		Rb-51 (No Parking)		Rb-55 (No Stopping)
	Rb-21 (One-Way Sign)		Rb-19 (Do Not Enter)		Rb-62 (No Heavy Trucks)
	Rb-12 (No Left Turn)		Rb-11 (No Right Turn)		Rb-79R (No Right Turn on Red)
	Wa-33L (Object Marker)		Wa-33R (Object Marker)		Wa-33LR (Object Marker)
	Wa-8LR (Checkerboard)		Wc-2 (School Crossing)		Rb-78 (Stop Here On Red Signal)
	Rb-84 (Reserved Bicycle Lane - Overhead)				

<u>Traffic Signal Mast Arms</u>		<u>Traffic Signal Poles</u>	
2' – 0.50m	15' – 4.57m	Type 1 (Aluminum Spun) - 1.5m	Type 5 – Rural SZ Flasher - 7.0m
4' – 1.20m	18' – 5.50m	Type 1 (Aluminum Spun) – 4.0m	Type 6 – Signal w/o lum/camera – 6.3m
6' – 1.80m	20' – 6.10m	Type 3 – Ped Pole – 3.8m	Type 6 – Power Pole – 7.0m
8' – 2.44m	22' – 6.70m	Type 3 – School ZF or Stop SF – 5.4m	Type 6 – Signal w/ lum /camera – 10.5m
10' – 3.00m	25' – 7.60m	Type 5 – Signal w/o lum/camera – 6.3m	Type 8 – Jumbo Signal w/ lum /camera – 10.4m
12' – 3.65m		Type 5 – Signal w/ lum /camera – 8.9m	Type 8 – Jumbo Signal w/o luminaire – 5.5m

#### Junction Boxes


**QUAZITE CDR – (13x24x18" – 33x61x46cm)**  
**B12132418A, C12132402A**

#### Traffic Signal Cabinet

Base Mounted – Econolite - NR Spec MSX, MXX, UPS  
Pole Mounted – Econolite - NR Spec G

# TYPES OF SPECIAL ARROW HEADS WITH BACKBOARD

ALL 30 cm LENSES, UNLESS SPECIFIED

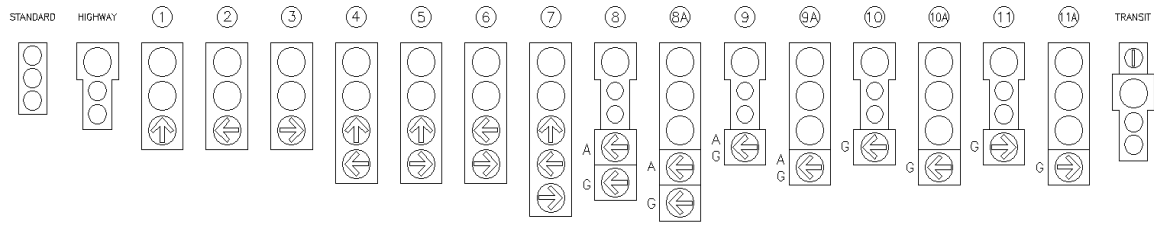

⑧ ⑧A ⑨ ⑨A AMBER ARROW MUST BE USED IN A PROTECTED/PERMISSIVE SIMULTANEOUS LEFT TURN OPERATION.